



GRADE 80 WELD ON LIFTING POINT

Weld, articulated, 180° pivot applications, general purpose has an utmost load bearing capacity that ranges from 1,120 kg up to 15,000 kg. Easy adjustment of lifting ring Ideal for welding to pipes. Quick and easy mounting. High dynamic and static strength.

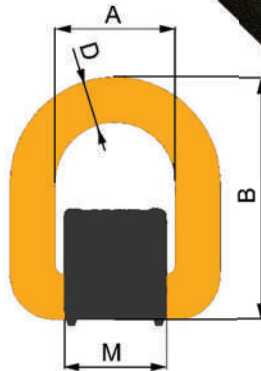

Part Number	Weight (Kg)	W.L.L (T)	A (mm)	B (mm)	D (mm)	M (mm)
9510	0.47	1.12	41	78.5	13	38
9511	0.51	2	42	88	14	40
950315	0.69	3.15	46	94	17	43
9514	1.46	5.3	55	118	22	61
9516	2.52	8	70	141	26.5	70.5
9506	3.59	10	85	165	28	76
9508	5.79	15	97	188	34	90

