





## Super-low Lifting Loop chain Electric Hoist

1T - 7.5T

### Product Features:

It is typical of unique optimal structure in shortening the distance between the machine body and the beam tracks, applicable to operations inside fairly low buildings, especially suitable for use

in temporarily erected plant buildings or on the sites where expansion of effective hoisting spaces inside the buildings is required.

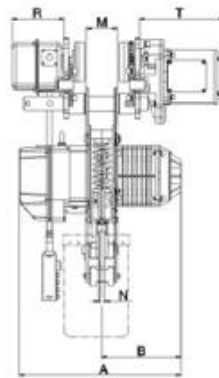

Model: ECHK-L

### • Technical Parameters

Product code	Capacity (tonne)	Lifting Height (m)	Lifting Speed (m/min)	Lifting Motor					Operating Motor					I-Beam (mm)	
				Power (Kw)	Rotation speed (r/min)	Phase	Voltage (v)	Frequency (Hz/s)	Power (Kw)	Rotation speed (r/min)	Operating speed (m/min)	Phase	Voltage (v)		Frequency (Hz/s)
ECHK0101L	1	3/9	6.6	1.5	1440	3	220-440	50	0.4	1440	11/21	3	220-440	50	58-153
ECHK0151L	1.5	3/9	8.8	3.0	1440	3	220-440	50	0.4	1440	11/21	3	220-440	50	82.178
ECHK0201L	2	3/9	6.6	3.0	1440	3	220-440	50	0.4	1440	11/21	3	220-440	50	82-178
ECHK0202L	2	3/9	3.3	1.5	1440	3	220-440	50	0.4	1440	11/21	3	220-440	50	82-178
ECHK0251L	2.5	3/9	5.4	3.0	1440	3	220-440	50	0.75	1440	11/21	3	220-440	50	100-178
ECHK0301L	3	3/9	5.4	3.0	1440	3	220-440	50	0.75	1440	11/21	3	220-440	50	100-178
ECHK0302L	3	3/9	4.4	3.0	1440	3	220-440	50	0.75	1440	11/21	3	220-440	50	100-178
ECHK0502L	5	3/9	2.7	3.0	1440	3	220-440	50	0.75	1440	11/21	3	220-440	50	100-178
ECHK0753L	7.5	3/9	1.8	3.0	1440	3	220-440	50	0.75	1440	11/21	3	220-440	50	100-178

### • Size specification

Product code	Capacity (tonne)	Unit(mm)													Chain (mm)
		H	A	B	K	L	M	N	I	J	P	Q	R	T	
ECHK0101L	1	480	520	260	Φ42	32	56	24	Φ26	Φ31	630	445	142	231	Φ7.1
ECHK0151L	1.5	570	615	295	Φ49	40	66	30	Φ31	Φ36	720	505	142	231	Φ10.0
ECHK0201L	2	570	615	295	Φ49	40	66	30	Φ31	Φ36	720	505	142	231	Φ10.0
ECHK0202L	2	535	520	260	Φ49	40	46	30	Φ31	Φ36	665	444.5	142	231	Φ7.1
ECHK0251L	2.5	640	615	295	Φ59	48	73	35	Φ36	Φ43	775	526	142	231	Φ11.2
ECHK0301L	3	640	615	295	Φ59	48	73	35	Φ36	Φ43	775	526	142	231	Φ11.2
ECHK0302L	3	685	615	295	Φ59	48	66	35	Φ36	Φ43	750	503	142	231	Φ10.0
ECHK0502L	5	740	615	295	Φ60	48	73	43	Φ43	Φ54	825	541	142	231	Φ11.2
ECHK0753L	7.5	890	615	295	Φ85	80	73	55	Φ43	Φ54	1020	730	142	231	Φ11.2