


# LIFTING COMPONENTS

## Screw Pin Bow Shackle Grade-S

### DESCRIPTION

- Forged: quenched and tempered with alloy pin
- WLL permanently shown on every shackle
- Hot dip galvanised body, yellow pin
- Fatigue rated

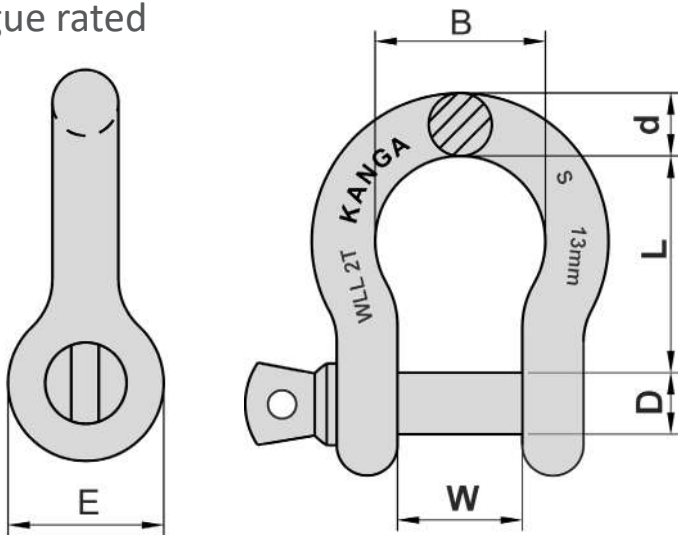

Part Number	Size (mm)	W.L.L (t)	Weight (kg)	Dimensions in (mm)					
				B	D	d	E	L	W
06BS05T	6	0.5	0.05	20	8	6	17	29	12
06BS075T	8	0.75	0.09	21	10	8	21	31	13
06BS01T	10	1	0.14	26	11	10	25	37	17
06BS01.5T	11	1.5	0.22	29	13	11	27	43	18
06BS02T	13	2	0.33	33	16	13	33	48	21
06BS03.2T	16	3.25	0.62	43	19	16	40	61	27
06BS04.7T	19	4.75	1.07	51	22	19	48	72	32
06BS06.5T	22	6.5	1.64	58	25	22	54	84	37
06BS08.5T	25	8.5	2.3	68	29	25	60	95	43
06BS09.5T	29	9.5	3.36	74	32	29	67	108	46
06BS12T	32	12	4.31	83	35	32	76	119	52
06BS13.5T	35	13.5	6.01	92	38	35	84	133	57
06BS17T	38	17	8.03	98	44	38	92	146	60
06BS25T	44	25	13.79	127	51	44	110	178	73
06BS35T	51	35	20.43	146	57	51	127	197	83
06BS55T	63	55	40	184	70	63	152	267	105