


LIFTING COMPONENTS

Screw Pin Dee Shackle Grade-S

DESCRIPTION

- Forged: quenched and tempered with alloy pin
- WLL permanently shown on every shackle
- Hot dip galvanised body, yellow pin
- Fatigue rated

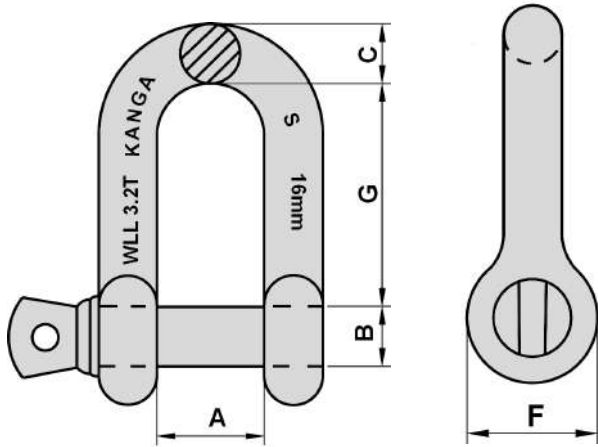

Part Number	Size (mm)	WLL (T)	Weight (Kg)	Dimensions in (mm)				
				A	B	C	F	G
06DS05T	6	0.5	0.05	12	8	6	17	22
06DS075T	8	0.75	0.8	13	10	8	21	26
06DS01T	10	1	0.13	17	11	10	25	32
06DS01.5T	11	1.5	0.2	18	13	11	27	37
06DS02T	13	2	0.3	21	16	13	33	41
06DS03.2T	16	3.25	0.58	27	19	16	40	51
06DS04.7T	20	4.75	1.02	32	22	19	48	60
06DS06.5T	22	6.5	1.43	37	25	22	54	71
06DS08.5T	25	8.5	2.16	43	29	25	60	81
06DS09.5T	29	9.5	3.06	46	32	29	67	90
06DS12T	32	12	4.11	52	35	32	76	100
06DS17T	38	17	7.24	60	44	38	92	124
06DS25T	44	25	12.14	73	51	44	110	146